



## **How to set up indoor extension on iVMS-4200**

<b>Title:</b>	How to set up indoor extension on iVMS-4200	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	1 of 3

## Preparation

1. This guide takes

Type	Model	Version
Indoor station*2	DS-KH6320-WTE1	V2.1.10_200713



As examples to introduce set up indoor extension on iVMS-4200.

2. Software: iVMS-4200 Version 3.4.0.9

## How to set up indoor extension on iVMS-4200

### 1. Add Devices to iVMS-4200


- 1) Search for online devices and activate them on iVMS-4200, enter username and password, and then confirm password.

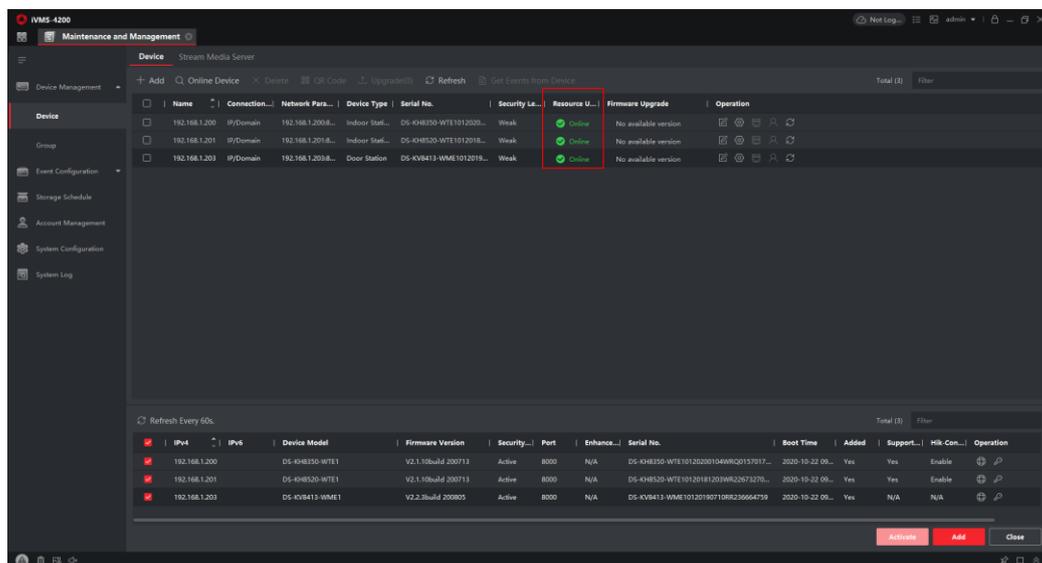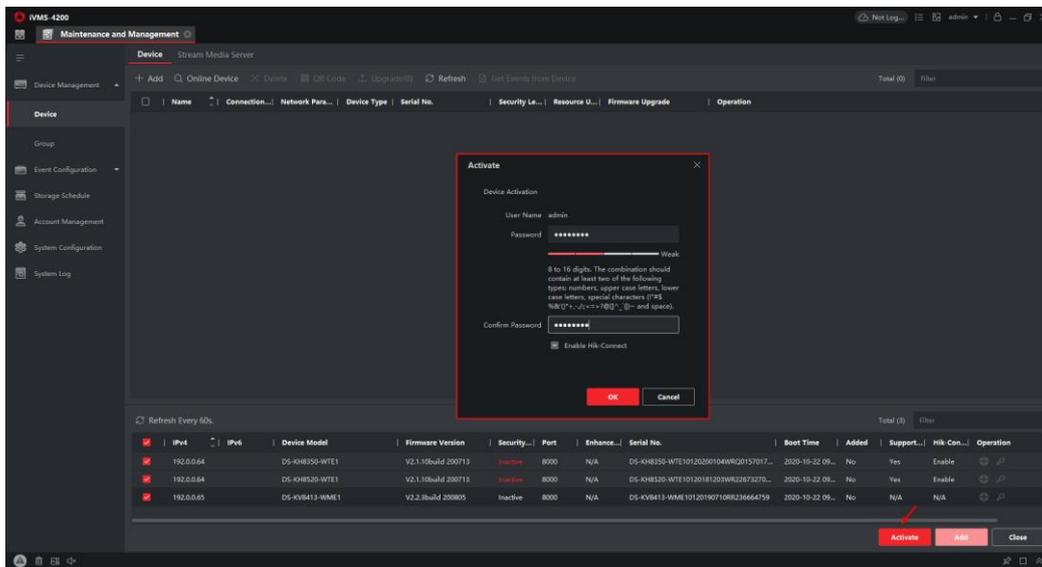


<b>Title:</b>	How to set up indoor extension on iVMS-4200	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom			<b>Page:</b>	2 of 3

## 2. Add indoor extension by Extension Settings


- 1) Choose the main indoor station **Configuration->Intercom->Extension Settings->Add.**

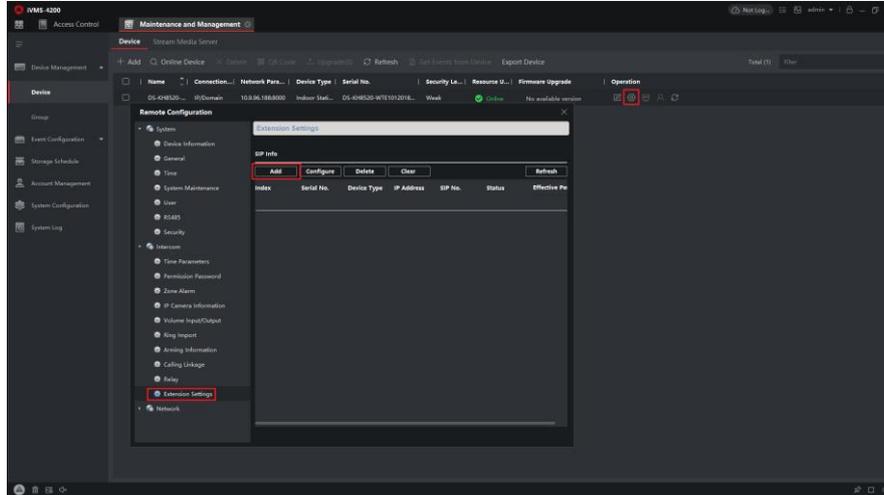

- 2) Select the indoor Extension type, fill in the chart with all the corresponding info.

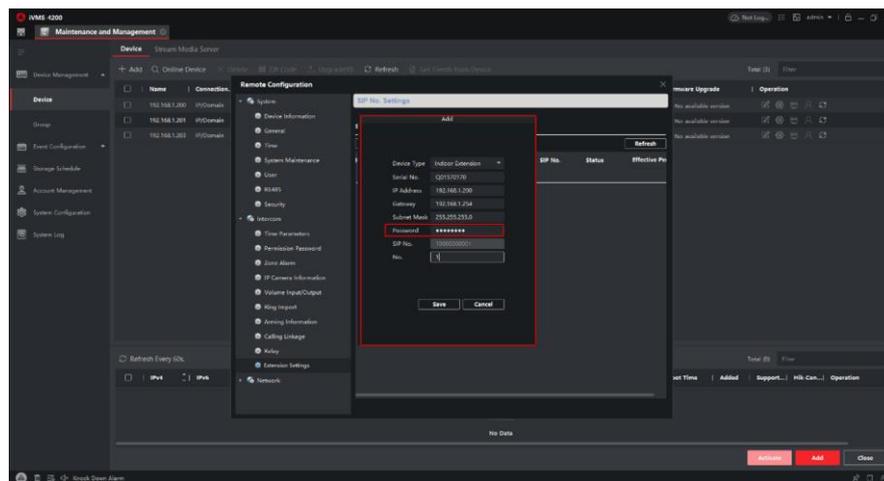


- 3) Then check the **Extension info**, the **Status** should be registered, now you can call indoor extension and indoor station by door station successfully.

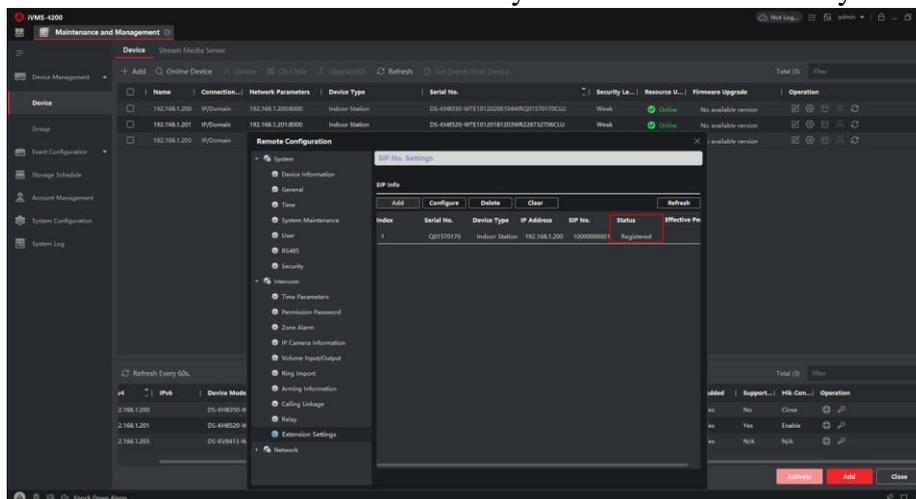

<b>Title:</b>	How to set up indoor extension on iVMS-4200	<b>Version:</b>	v1.0	<b>Date:</b>	2020/11/24
<b>Product:</b>	Video Intercom	<b>Page:</b>	3 of 3		

### 3. Dial Each Indoor Station

- 1) If the **main indoor station** dial the **indoor extension No.1**. Home Page > Phone Icon > Call Resident. Then Call 0-1. If the **indoor extension** dial the **main indoor station**. Home Page > Phone Icon > Call Resident. Then Call 0-0.

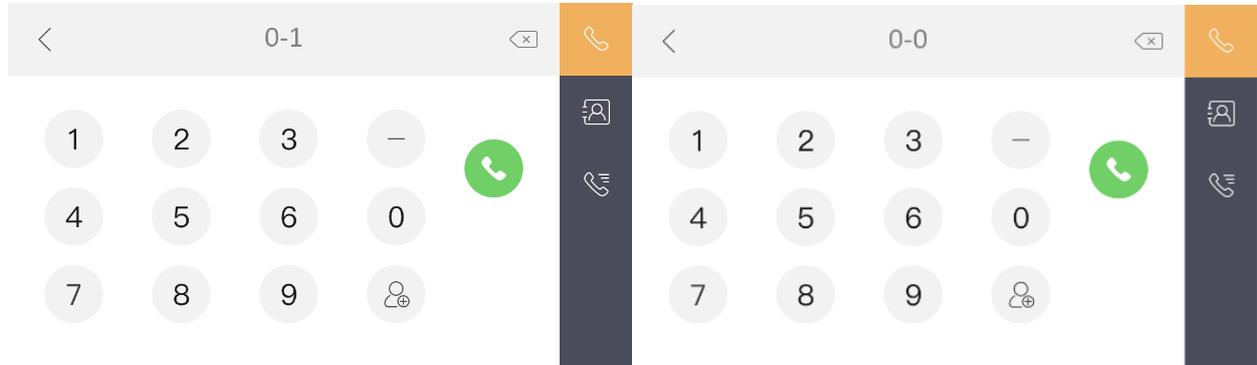



See Far, Go Further