


## DS-MH6171I 2MP Network Portable IR Speed Dome

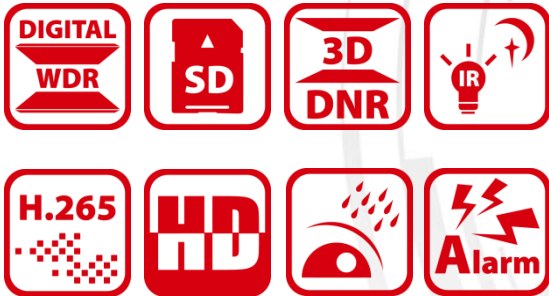

Embedded with 4G, Wi-Fi, GPS module, and the LPR algorithm, DS-MH6171I portable IR speed dome is widely used in temporary events surveillance and license plate recognition for mobile scenes, e.g. parade, strike, outdoor concert, law enforcement, and onboard monitoring, etc.

### Key Features

#### Video

- 1/3" progressive scan CMOS; 1920 × 1080/1280 × 720 resolution
- H.265+/H.265/H.264 video compression
- 30× optical zoom, 12× digital zoom
- HLC/BLC/3D DNR/Defog/EIS
- Support up to 80 m IR distance

#### Storage

- Dual built-in SD/SDXC card slot, up to 128 GB for each memory card

#### Communication Module

- Support 4G module; 802.11a/b/g/n Wi-Fi; GPS positioning module; Bluetooth 4.0

#### Usability

- Support quick installation with the magnetic base and the tripod bracket
- Support Wi-Fi AP, which allows to connect the phone to the camera directly and control the camera conveniently
- Pluggable battery for continuous work, up to six hours
- Replaceable battery for sustainable work
- True 360° endless pan and -15° to 90° (auto-flip) tilt movement range for PTZ

#### Smart Function

- Support LPR (License Plate Recognition) and blacklist



## Specification


Camera Module	
Image Sensor	1/3" progressive scan CMOS
Min. Illumination	Color: 0.05 Lux @(F1.6, AGC ON) B/W: 0.01 Lux @(F1.6, AGC ON) 0 Lux with IR
S/N Ratio	> 52dB
Signal System	PAL/NTSC
White Balance	Auto 1/Auto 2/Manual/Indoor/Outdoor/Fluorescent Lamp/Sodium Lamp
Shutter Time	1/1 s to 1/30,000 s
Day & Night	IR Cut Filter
Digital Zoom	12×
Focus Mode	Auto/Semi-automatic/Manual
WDR	Digital WDR
Lens	
Focal Length	4.5 mm to 135 mm, 30× optical
Zoom Speed	Approx. 4 s (optical lens, wide-tele)
FOV	Horizontal field of view: 65.1° to 2.34° (wide-tele)
Working Distance	10 mm to 1500 mm (wide-tele)
Aperture Range	F1.6 to F4.4
IR	
IR Distance	Up to 80 m
IR Intensity	Automatically adjusted, depending on the zoom ratio
Compression Standard	
Video Compression	H.265/H.264+/H.264
H.264 Type	Baseline Profile/Main Profile/High Profile
H.265 Type	Main Profile
Video Bitrate	32 Kbps to 8 Mbps
Image	
Resolution	50Hz: 25 fps (1920 × 1080, 1280 × 720) 60Hz: 30 fps (1920 × 1080, 1280 × 720)
Image Enhancement	HLC/BLC/3D DNR/Defog/EIS
PTZ	
Movement Range (Pan)	360° endless
Movement Range (Tilt)	From -15° to 90° (Auto-flip)
Network	
Protocols	IPv4/IPv6, HTTP, HTTPS, FTP, SNMP, DNS, NTP, RTSP, RTCP, RTP, TCP/IP, UDP, DHCP,
API	HIKVISION SDK, ONVIF, ISAPI,
Network Storage	Double built-in SD/SDXC card slot, up to 128 GB
Communication	Support 3G (WCDMA) Support 4G Support double 3G or 4G modular
Wi-Fi	802.11a/b/g/n
GPS System	Support
Smart Function	License Plate Recognition
Blacklist	Up to 100,000 items can be saved.
Interface	
Network Interface	1 RJ45 10 M/100 M Ethernet Interface; PoE+ (802.3at, class4)

Bluetooth	BT 4.0
RS-485	PELCO-D
<b>General</b>	
Power	8 VDC to 36 VDC Approx. 15 W
Working Environment	Working Temperature: -20°C to 60°C (-4°F to 140°F) Working Humidity: ≤ 90%
Protection Level	IP66 Standard; TVS 4000V Lightning Protection, Surge Protection and Voltage Transient Protection
Dimensions	Φ 154.79 mm × 23.7 mm (Φ 6.09" × 9.20")
Weight	Approx. 2.8 kg (6.17 lb)

**Available Model**

DS-MH6171I

**Dimensions**

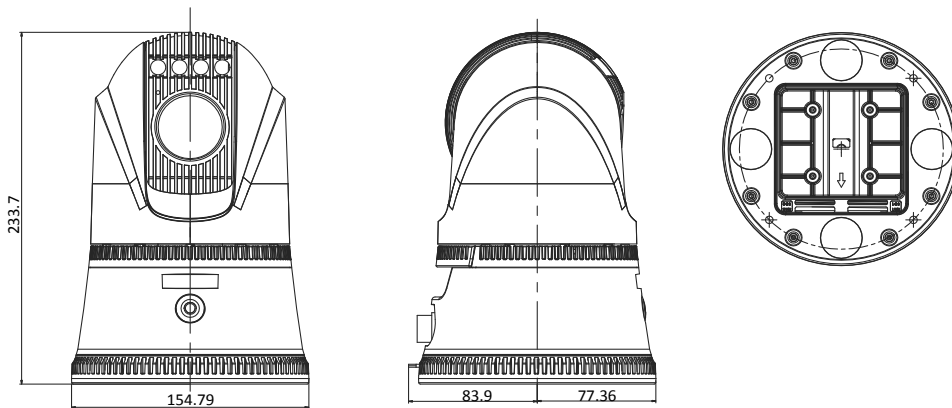

Unit: mm


**Accessories**



DS-MH1691I-H



Battery Charger DS-MH1490

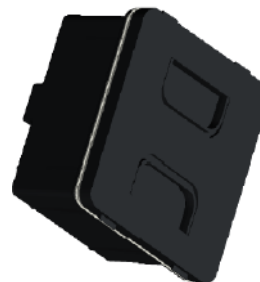

Lithium Battery

Distributed by



**HIKVISION**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761