



DS-PDPC12PF-EG2-WB

Colorful Wireless PIR Camera

PIRCAM is a fully supervised two-way wireless detector with built-in high quality camera which can provide an ideal solution for video verification via motion pictures transmitted to an ARC or to personal phones via APPs. Protect your premises day and night by viewing real-time images for fast and accurate response to real alarm events.



- Detection range: 12m / 85.9°
- Up to 30KG pet immunity
- SEC (Smart Environmental Control) Advanced digital signal processing and 3D optics
- 24/7 colorful imaging
- Large integrated memory buffer for image storage
- Fully remote configurable through App
- Multiple enrollment method and easy installation design
- Easy replaceable battery with PCB protected



Specification

	Model	DS-PDPC12PF-EG2-WB
Detection Performance	Detection Method	Passive Infrared, Video Verification
	Sensor Model	SFG321-711
	Detection Range	12m
	Detection Angle	85.9°
	Detection Zones	52
	Detectable Speed	0.3 to 2m/s
	Sensitivity	Auto,High,Pet
	Pet Immunity	30Kg
	White Light Filter	6500lux
	Digital Temperature Compensation	Support
	Creep Zone Protection	Support
Feature	Digital Processing	Support
	Sealed Optics	Support
	Tamper Protection	Front,Rear
	Environment Temperature Indicator	Support
	Signal Strength Indicator	Support
Video	Image Sensor	ASX340
	Field Angle	88°(H), 68°(V)
	Image Type	JPEG
	Resolusion	640*480,320*240,160*120
	Frame Rate	2
	Fill Light	White Light
	Fill Range	12m
	Day/Night Switch	Color
	Power Switch	Power Up Enrolling
Interface	LED Indicator	Blue(Alarm)
	Transmission Technology	CAM-X Wireless
	Transmission Method	Two-Way RF Wireless
Transmission	Transmission Frequency	433MHz
	Transmission Security	AES-128 Encryption
	Transmission Range(Free Space)	800m
	Enrolling Method	Power up,Remote ID,QR Code
Electrical Characteristics	Standard Battery Life	6 years in work status (being triggered and
		completely uploading captures twice every week)
	Power Supply	Battery Powered
	Battery Type	CR123A × 3
	Typical Voltage	3V
General	Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Operation Humidity	10% to 90%
	Dimension(WxHxD)	72.2mm × 120.5mm × 56.7mm




Weight	220g
Mounting Height	1.8 to 2.4m
Mounting Method	Wall
Application Scenario	Indoor
Bracket	Optional Wall & Detailing Accessory

Available Model

DS-PDPC12PF-EG2-WB

Accessory

Optional

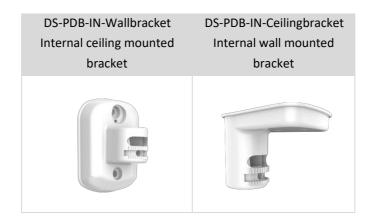





Distributed by

HIKVISION°

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T+61-2-8599-4233 salesau@hikvision.com

Hikvision India T+91-22-28469900 sales@pramahikvision.com

Hikvision Canada T+1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T+662-275-9949 sales.thailand@hikvision.com

Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T+39-0438-6902 info.it@hikvision.com

Hikvision Brazil T +55 11 3318-0050 Latam.support@hikvision.com

Hikvision Turkey T +90 (216)521 7070- 7074 sales.tr@hikvision.com

Hikvision Malaysia T+601-7652-2413 sales.my@hikvision.com

Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33[0]1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com

Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com

Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com