

RG-EST350 V2

5 GHz Dual-stream 802.11ac 5 km Wireless Bridge



Highlights

- RG-EST350 V2 can easily transmit data from 5KM away in real time
- Factory-paired bridges for long-distance installation, without complex alignment
- IP54 Weatherproof, -30°C~65°C guarantee stable operating
- Support maximum 45 * 2MP cameras loading at 3KM, 20 * 2MP cameras loading at 5KM
- Visually Intuitive statistics monitoring on Ruijie cloud, easy maintenance at remotely

Highlight Features


RG-EST350v2

5GHz Dual-stream 802.11ac Next-generation Wireless Bridge



Long Range

High-speed wireless data transmission at 5KM range

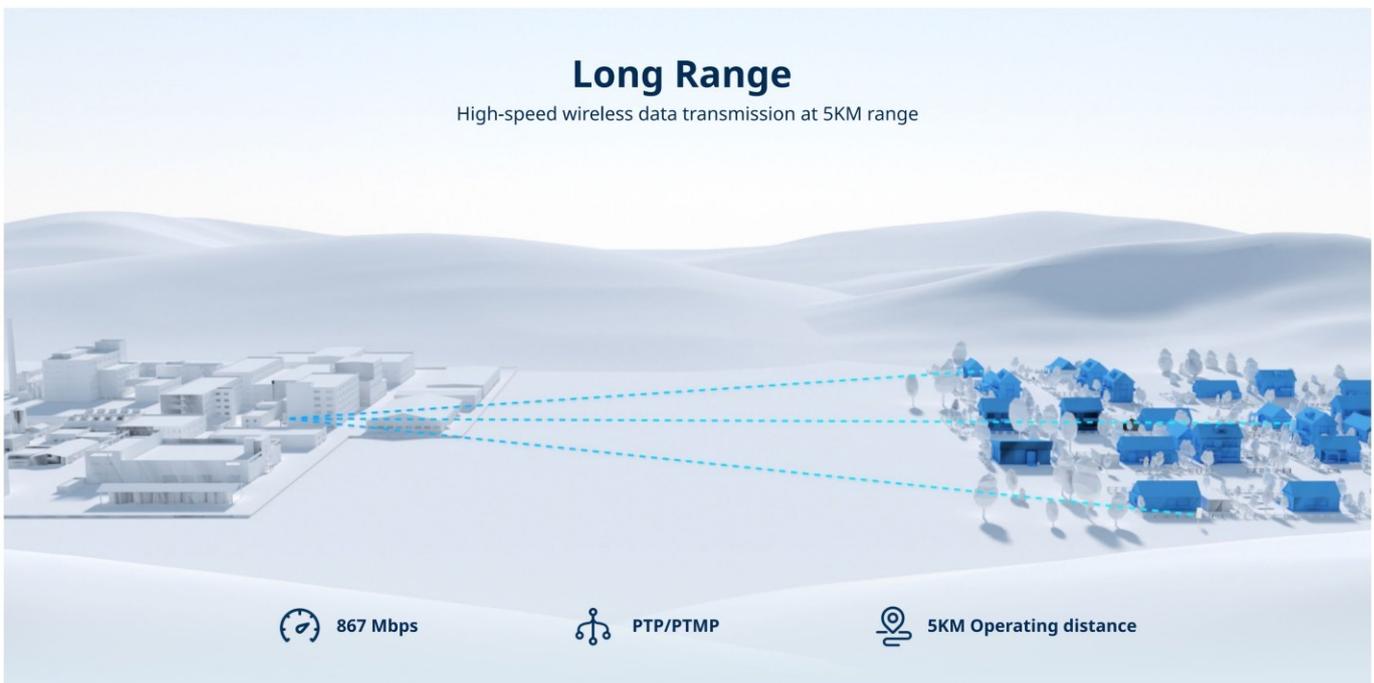

Highlight Features

High Capacity

45 cameras maximum at 3KM, 20 cameras maximum at 5KM*



3KM

2MP

x 45 Units



5KM

2MP

x 20 Units

*H.265, 2MP Cameras, 3Mbps. To guarantee the transmission quality, the environment should be kept as open as possible to reduce the interference. At the same time, it is recommended to adjust it to the best alignment angle with the signal strength indicator or Ruijie Cloud APP.

Reliable



V0 level
flame retardant



IP54
Weatherproof



-30~65°C operating
temperature

Highlight Features

Convenient


Zero configuration automatic pairing
Plug and Play



Easy to Install



Cloud, Make Your Business Easy

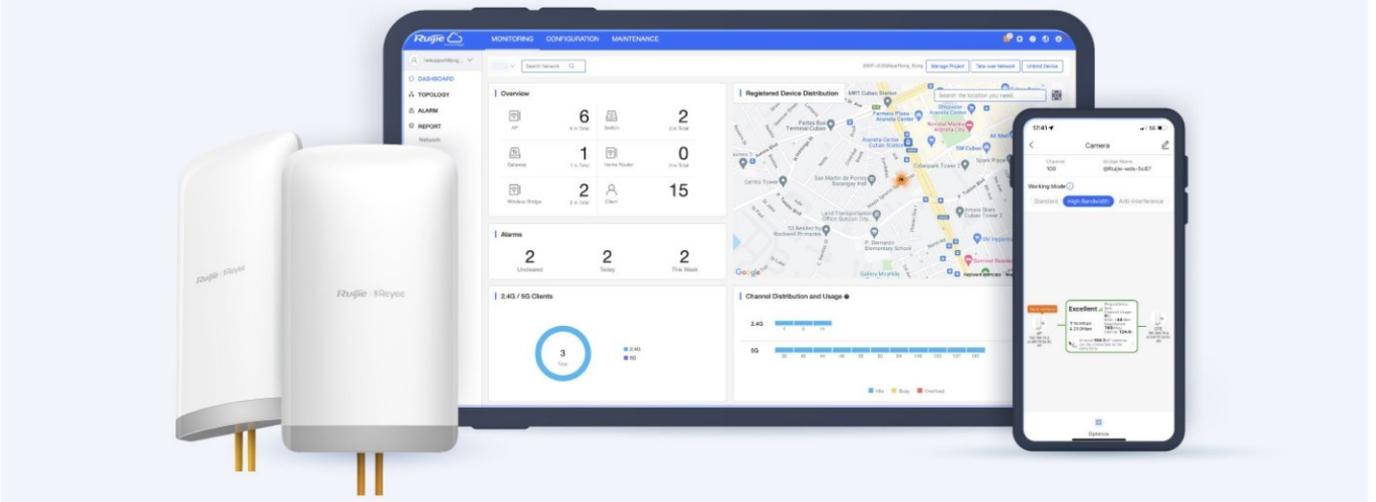

Dashboard Overview:

Overview	6	2
Registered Device Distribution	1	0
Alarms	2	2
2.4G / 5G Clients	3	2.4G

Registered Device Distribution:

- 2.4G: 1
- 5G: 0

Channel Distribution and Usage:

- 2.4G: 3
- 5G: 2

/ Product Information

Model	RG-EST350 V2
Product Type	Bridge
Accessory	No

/ Hardware Specifications

Model	RG-EST350 V2
Applicable Scenarios	
Applicable Scenarios	CCTV
Wi-Fi Radio	
Radio design	Single-radio 2 spatial streams <ul style="list-style-type: none">Radio 1: 5 GHz, 2 spatial streams: 2 x 2, MIMO
Operating band	IEEE 802.11a/n/ac: 5.150 GHz to 5.350 GHz IEEE 802.11a/n/ac: 5.470 GHz to 5.725 GHz IEEE 802.11a/n/ac: 5.725 GHz to 5.850 GHz Note: Available bands vary with countries and regions. To use the preceding frequency bands, ensure that your country or region supports these frequency bands. For details, see Channels for Countries & Regions (official website link to be added).
Wi-Fi standard	Wi-Fi 5 (IEEE 802.11ac) standard, compatible with IEEE 802.11a/n standards
5 GHz Wi-Fi	Wi-Fi 5 (IEEE 802.11ac)
5 GHz channel width	Auto/20/40/80 MHz
Transmission rate	Maximum wireless data rate: 866 Mbps <ul style="list-style-type: none">Radio 1: 5 GHz, 866 Mbps
Maximum transmit power	Frequency bands and maximum Effective Isotropic Radiated Power (EIRP): Note: Country specific restrictions apply. European Union & United Kingdom: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5470–5725 MHz, EIRP ≤ 30 dBm Myanmar: 2400–2483.5 MHz, EIRP ≤ 23 dBm 5725–5850 MHz, EIRP ≤ 30 dBm

Hardware Specifications

Model	RG-EST350 V2
	<p>Thailand: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5850 MHz, EIRP ≤ 30 dBm</p> <p>Indonesia: 2400–2483.5 MHz, EIRP ≤ 36 dBm 5725–5825 MHz, EIRP ≤ 36 dBm</p> <p>Egypt: 2400–2483.5 MHz, EIRP ≤ 20 dBm 5150–5350 MHz, EIRP ≤ 23 dBm</p> <p>Vietnam: 5150–5350 MHz, EIRP ≤ 23 dBm 5470–5725 MHz, EIRP ≤ 30 dBm 5725–5850 MHz, EIRP ≤ 30 dBm</p>
Maximum transmit power (5 GHz)	<p>Combined power: 29 dBm (single stream power: 26 dBm) Note: The transmit power varies according to regulations in different countries and regions.</p>
Receive sensitivity	<p>802.11a: -89 dBm (6 Mbps), -80 dBm (24 Mbps), -76 dBm (36 Mbps), -71 dBm (54 Mbps) 802.11n: -83 dBm@MCS0, -65 dBm@MCS7, -83 dBm@MCS8, -65 dBm@MCS15 802.11ac HT20: -83 dBm (MCS0), -57 dBm (MCS9) 802.11ac HT40: -79 dBm (MCS0), -54 dBm (MCS9) 802.11ac HT80: -76 dBm (MCS0), -51 dBm (MCS9)</p>
Modulation	<p>802.11a/g/n: BPSK, QPSK, 16-QAM, 64-QAM 802.11ac: BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM</p>
Highest QAM order	256
Antenna	
Antenna	5 GHz: 2 x 2 Built-in directional antenna, horizontal: 31°, vertical: 14°
Antenna gain (5 GHz)	15 dBi
Antenna horizontal orientation	31°
Antenna vertical orientation	14°
System Specifications	
CPU	Dual-core processor, 880 MHz clock frequency per core
Flash memory	8 MB

Hardware Specifications

Model	RG-EST350 V2
RAM	128 MB DDR3
Dimensions and Weight	
Weight	0.49 kg (1.09 lbs) (without packaging materials)
Shipping weight	2.15 kg (4.74 lbs)
Product dimensions (W x D x H)	132 mm x 48 mm x 230 mm (5.20 in. x 1.89 in. x 9.06 in.) (excluding mounting bracket)
Package dimensions (W x D x H)	356 mm x 326 mm x 78 mm (14.02 in. x 12.83 in. x 3.07 in.)
Color	Elegant white
Port Specifications	
Number of fixed LAN ports	2
Number of 10/100/1000BASE-T ports	2
Reset button	1
LEDs	1 x system status LED 2 x Ethernet port LEDs 3 x signal status LEDs
Power Supply and Consumption	
Power supply	Power supply options: <ul style="list-style-type: none">• DC power adapter• Passive PoE adapter
Power input	Passive PoE adapter: <ul style="list-style-type: none">• Rated input voltage: 100 V AC to 240 V AC, 50 Hz to 60 Hz• Rated input current: 0.5 A Max• Rated output voltage: 24 V DC• Maximum output current: 0.6 A
Number of PoE In ports	1
Local power supply	Yes, one DC power connector (12 V, 1 A)
Dimensions of the DC connector	Outer Diameter: 5.50 mm \pm 0.05 mm (0.22 in. \pm 0.002 in.) Inner Diameter: 2.10 mm \pm 0.05 mm (0.08 in. \pm 0.002 in.) Depth: 9 mm (0.35 in.)
Maximum power consumption	9 W
Environment and Reliability	

Hardware Specifications

Model	RG-EST350 V2
Mounting options	Wall/Pole
Operating temperature	-30°C to +65°C (-22°F to +149°F)
Storage temperature	-40°C to +70°C (-40°F to +158°F)
Operating humidity	5% RH to 95% RH (non-condensing)
Storage humidity	5% RH to 95% RH (non-condensing)
Altitude	Operating altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.) Storage altitude: -500 m to +5,000 m (-1,640.42 ft. to +16,404.20 ft.)
MTBF	400,000 hours (about 45 years)
Cooling	Natural cooling
IP rating	IP54
ESD protection	Standard test: contact discharge=8 kV, air discharge=15 kV, Class B
Surge protection	Service port: ±4 kV for common mode Power connector: ±4 kV for common mode and ±2 kV differential mode
Certification and Regulatory Compliance	
Safety compliance	EN62368-1
EMC	EN 55032 EN 55035 EN 61000-3-3 EN 61000-3-2 EN 301489-1 EN 301489-3 EN 301489-17
Certification	CE, FCC, CB, ISED, cTUVus

Software Specifications

Model	RG-EST350 V2
WLAN	
BaseStation/CPE mode switching	Yes
Enhanced one-to-many transmission (TDMA)	No
Bridge SSID hiding	Yes
WPA2-PSK encryption	Yes
WPA-PSK encryption	No
WPA/WPA2-PSK encryption	No
Recommended channel	Yes
Bridge speed test	Yes
Random security key upon configuration delivery	No
Configuring a security key for network-wide bridges	Yes
Configuring a security key for a single bridge group	Yes
Configuring a security key for a single bridge	Yes
Bridge SSID, channel, and power configuration	Yes
WMM	Yes
Maximum PTMP connections	3
Maximum bridge distance	5 km (3.11 miles)
One-touch pairing	Yes
Maximum effective distance of one-touch pairing	50 m (160.04 ft.)
Bridge performance	230 Mbps/1 km (0.62 miles) (HT40) 200 Mbps/3 km (1.86 miles) (HT40) 150 Mbps/5 km (3.11 miles) (HT40)
RSSI	- 58 dBm/1 km (0.62 miles) - 66 dBm/3 km (1.86 miles) - 70 dBm/5 km (3.11 miles)

Software Specifications

Model	RG-EST350 V2
Recommended number of connected cameras (3 Mbps)	50/1 km (0.62 miles) 45/3 km (1.86 miles) 20/5 km (3.11 miles)
Recommended number of connected cameras (4 - 5 Mbps)	30/1 km (0.62 miles) 25/3 km (1.86 miles) 12/5 km (3.11 miles)
Recommended number of connected cameras (6 - 7 Mbps)	20/1 km (0.62 miles) 13/3 km (1.86 miles) 8/5 km (3.11 miles)
Recommended number of connected cameras (7-8 Mbps code streams)	15/1 km (0.62 miles) 12/3 km (1.86 miles) 6/5 km (3.11 miles)
Real-time signal strength	Yes
Optimal signal strength	Yes
Active/Standby channel	Yes
Restoring to the active channel	Yes
Maximum number of devices on the SON	200
Basic Configurations	
eWeb login with the username and password	Yes
Local upgrade	Yes
Configuration backup	Yes
System language	Chinese (Simplified), English
System time settings	Yes
Ethernet Switching	
Interface rate	10/100/1000 Mbps auto-negotiation
VLAN	Yes
Link aggregation	No
IP Service	
IPv4 ping	Yes

Software Specifications

Model	RG-EST350 V2
IPv4 traceroute	Yes
DHCP server	Yes
DHCP client	Yes
Security	
Broadcast storm control	Yes
Network Management and Monitoring	
SON	Yes
AI heatmap	No
Camera detection	No
Network-wide management SSID configuration	Yes
Network connection through the management SSID	No
Ruijie Cloud management	Yes
Restarting devices through Ruijie Reyee App	Yes
SNMPv1, v2c, and v3	No
Fault diagnosis	Yes Note: support for network tools (ping, traceroute, and nslookup), fault alarms, and fault collection
Restart cause prompt	No
Disconnection cause prompt	No
Cloud alarms on DFS signal detection	No

Package Contents

Model	RG-EST350 V2
Device	
Device	2
Accessories	
Hose clamp	2
Power adapter	2 Note: 24 V passive PoE adapter
Power cord	2
Mounting bracket	2 x Ball joint mount 2 x Lock ring 2 x Mounting Bracket
Screw	6 x Wall anchors 8 x Phillips pan head screws (self-tapping screws 4.2 mm x 19 mm)
Manual	
User Manual	1
Warranty Card	1

Ruijie | ReYee

 Redefine your easy network



Ruijie Networks Co., Ltd.

Official Website: <https://Reyee.Ruijie.com>