

DS-QAZ1MP7G1
7-inch paging microphone



- 7-inch color IPS touch screen
- Support live/schedule/emergency broadcasting, TTS
- Support 3.5 mm audio input
- Support partition management
- Support emergency call
- Support up to 6 shortcut options (F1 to F6) can be defined
- Support wired network access and standard PoE power supply





▪ Specification

| Protocol | |
|-----------------------|---|
| Network Protocol | ISAPI, ISUP |
| Microphone | |
| Frequency Response | Gooseneck microphone: 100Hz to 15KHz, built-in microphone: 100Hz to 10KHz |
| Function | |
| Audio Bit Rate | MP3, 128 Kbps |
| Echo Cancellation | Yes |
| Network | |
| Client | HikCentral Professional |
| Interface | |
| Network Interface | 1 |
| Local Storage | Support TF card |
| Audio In | Gooseneck MIC, custom USB interface; LINE In × 1, 0 dBV, 100 kΩ, unbalanced, 3.5 mm jack; Local MIC |
| Audio Out | LINE Out × 1, 0 dBV, unbalance, 3.5 mm jack; Local speaker |
| Button | Physical buttons and on-screen buttons |
| Display Screen | IPS, 7 inches, 1024 × 600, touch screen |
| General | |
| Power | 12 VDC, max.10 W |
| System Requirement | Embedded operating system |
| Operating Temperature | -10 °C to +50 °C (14 °F to 122 °F) |
| Operating Humidity | 10% to 90% |

▪ Available Model

DS-QAZ1MP7G1

▪ Dimension

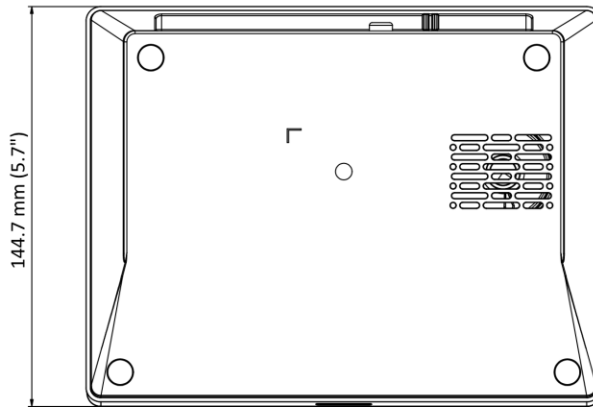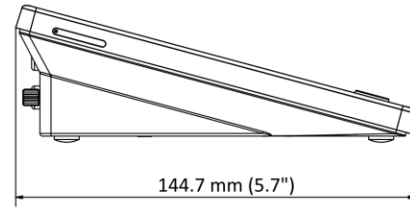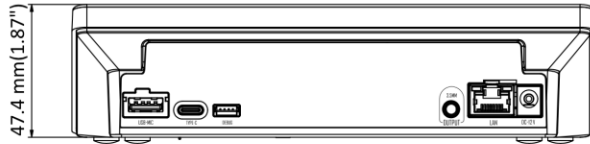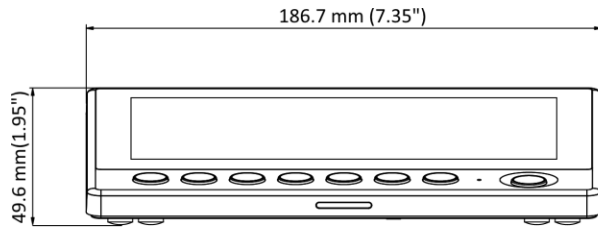

See Far, Go Further



www.hikvision.com
support@hikvision.com

