

DS-PDMC-EG2-WB(B) Magnetic Contact





- Slim design for an unobtrusive (unnoticeable) installation
- Fully remote configurable through App
- Multiple enrollment methods and easy installation design
- Frequency hopping against jamming for reliable transmission

▪ Specification

Model		DS-PDMC-EG2-WB(B)
Detection Performance	Detection Method	Opening Contact
	Detection Gap	43mm Max
Feature	Digital Processing	Support
	Tamper Protection	Front,Rear
	Environment Temperature Indicator	Support
	Signal Strength Indicator	Support
Interface	Alarm Input	Normally Closed,Normally Open,Impulse Count
	Power Switch	Power Up Enrolling
	LED Indicator	Blue (Alarm)
Transmission	Transmission Technology	Tri-X Wireless
	Transmission Method	Two-Way RF Wireless
	Transmission Frequency	433MHz
	Transmission Security	Support
	Transmission Range(Free Space)	1.2 km
	Frequency Hopping	Support
	Enrolling Method	Power up,Remote ID,QR Code
Electrical Characteristics	Standard Battery Life	Up to 5 years (standby time)
	Power Supply	Battery Powered
	Battery Type	CR123A x 1
	Typical Voltage	3V
General	Operation Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Storage Temperature	-20 °C to 60 °C (-4 °F to 140 °F)
	Operation Humidity	10% to 90%

	Dimension(W xHxD)	24mm × 104mm × 24.4mm 13mm × 34.4mm × 11.4mm
	Weight	59g
	Application Scenario	Indoor

▪ Dimension

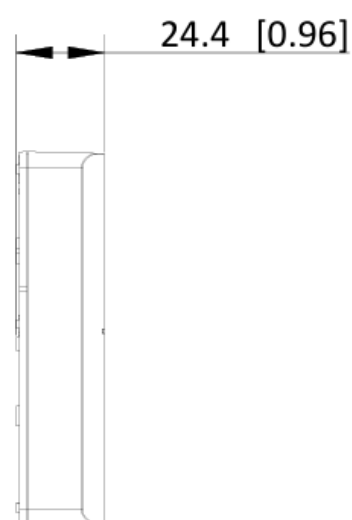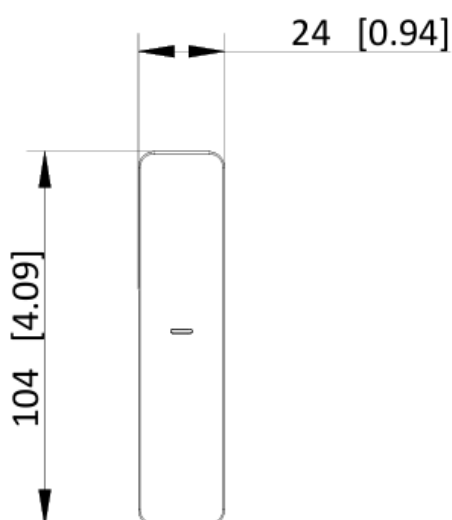

▪ Accessory

▪ Optional

DS-PDB-MC-Brown (B) Magnetic Contact Brown Housing	DS-PDB-MC-Adapter Magnetic Contact Adapter	DS-PDP-IN-CR123A Indoor Detector Battery	DS-PWA96-Kit-WB/ 12V AX PRO Kit (433MHz)	DS-PDB-MC-Brown Magnetic Contact Brown Housing

See Far, Go Further



www.hikvision.com
support@hikvision.com

